


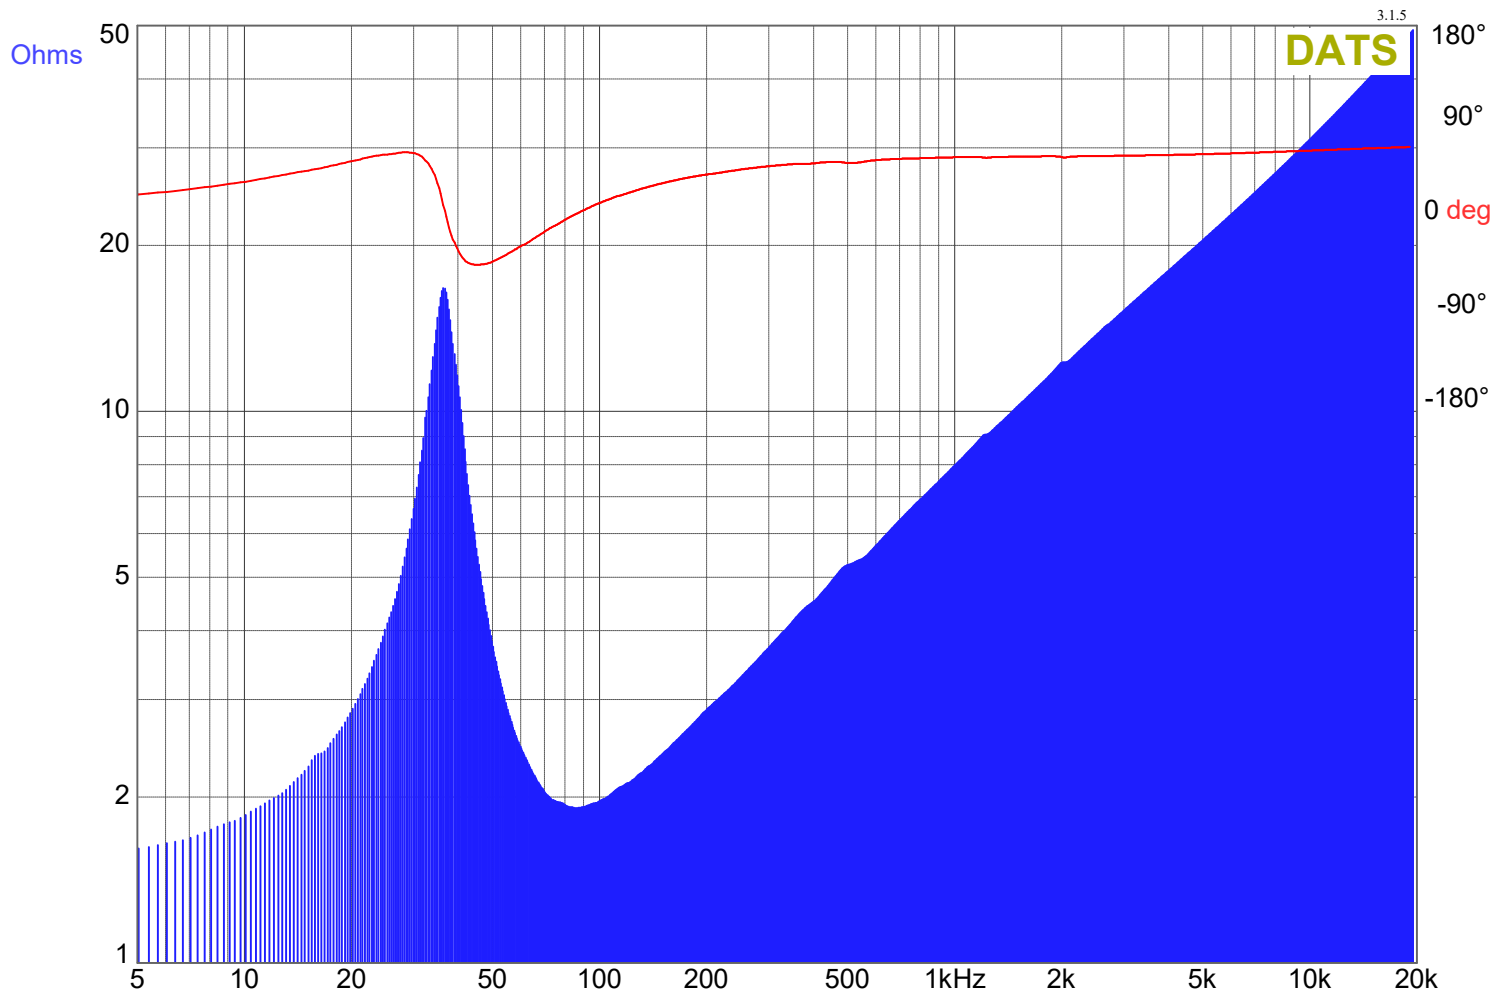

Workbench Notes:

Manufacturer: MDS

$f(s) = 36.47 \text{ Hz}$

$Q(ts) = 0.6014$

$V(as) = 59.93 \text{ liters (2.116 cubic feet)}$

$SPL = 88.31 \text{ dB SPL 1W/1m}$

Nominal Diam. = 300 mm (0 in.)

Model: PS12500D4

$R(e) = 1.548 \text{ Ohms}$

$Q(es) = 0.6627$

Piston Diam. = 284 mm (11.18 in.)

$SPL = 95.45 \text{ dB SPL 2.83 Vrms}$

$C(ms) = 0.106 \text{ mm/N}$

$Z(max) = 16.73 \text{ Ohms}$

$L(e) = 0.4976 \text{ mH at 10kHz}$

$Q(ms) = 6.5$

$BL = 9.791$

$n(0) = 0.4183 \%$

$M(ms) = 179.1 \text{ grams}$

Mittaus suoritettu 6h Subwppferin sisäänajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Hannu Markuksela

Title: Audio engineer