


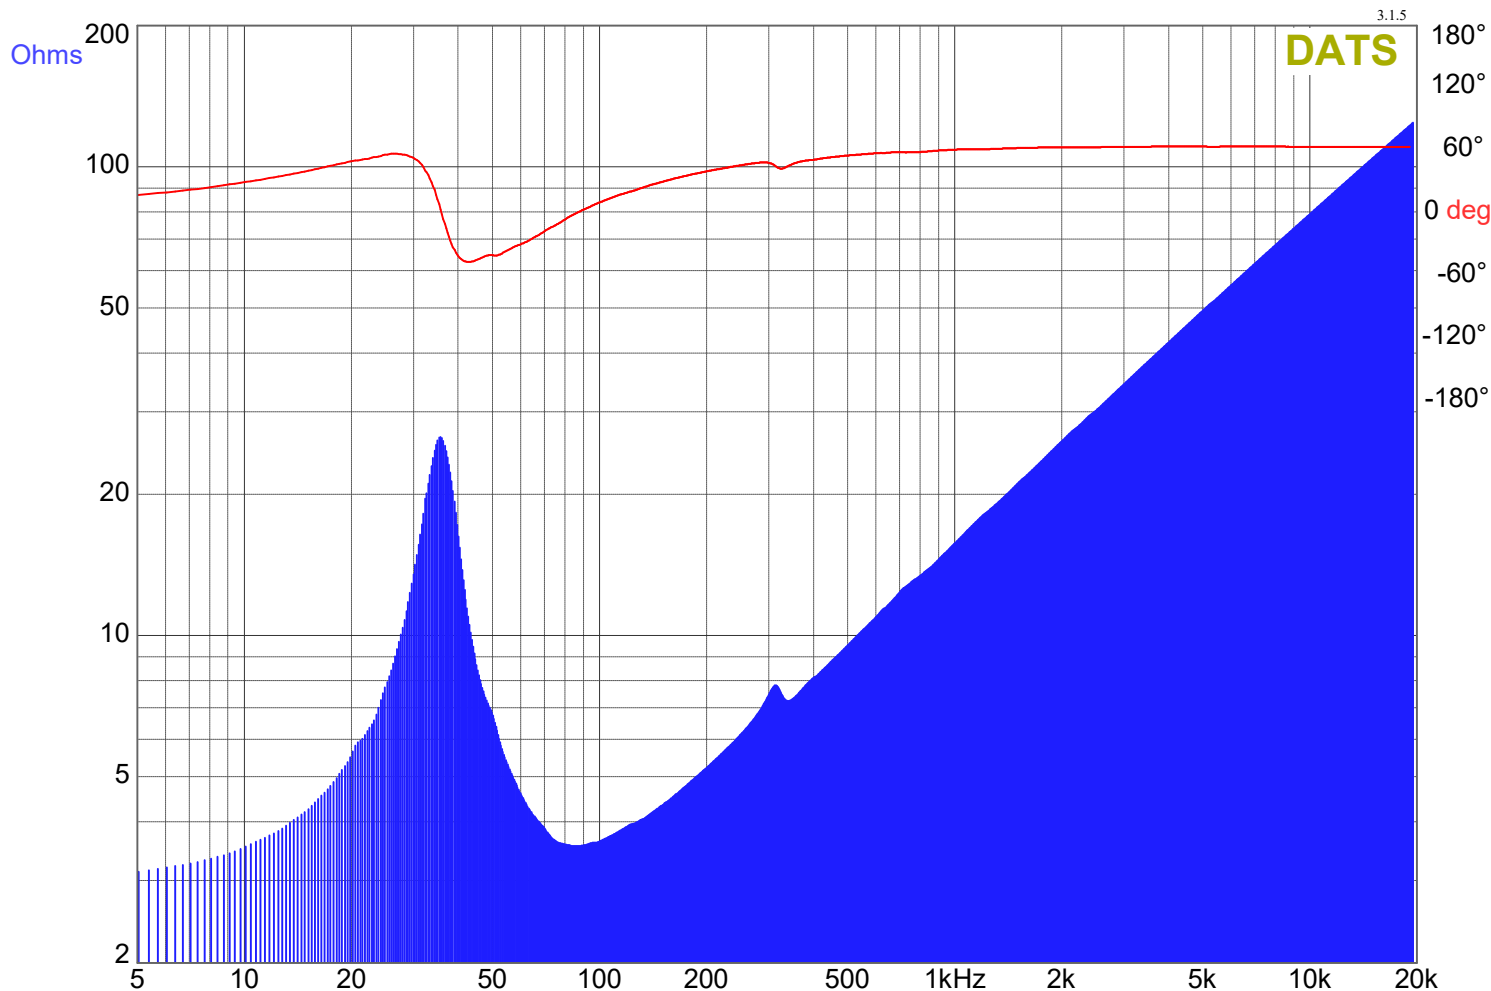

Workbench Notes:

Manufacturer: DLE

$f(s) = 35.63 \text{ Hz}$

$Q(ts) = 0.6598$

$V(as) = 87.85 \text{ liters (3.103 cubic feet)}$

$SPL = 89.17 \text{ dB SPL 1W/1m}$

Nominal Diam. = 300 mm (0 in.)

Model: HF12S

$R(e) = 3.008 \text{ Ohms}$

$Q(es) = 0.7444$

Piston Diam. = 280 mm (11.02 in.)

$SPL = 93.42 \text{ dB SPL 2.83 Vrms}$

$C(ms) = 0.165 \text{ mm/N}$

$Z(max) = 26.48 \text{ Ohms}$

$L(e) = 1.263 \text{ mH at 10kHz}$

$Q(ms) = 5.809$

$BL = 10.46$

$n(0) = 0.5091 \%$

$M(ms) = 120.9 \text{ grams}$

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Paukatie 2

Oulu 90410

08 348300

Measurements by: Hannu Markuksela

Title: Audio engineer