


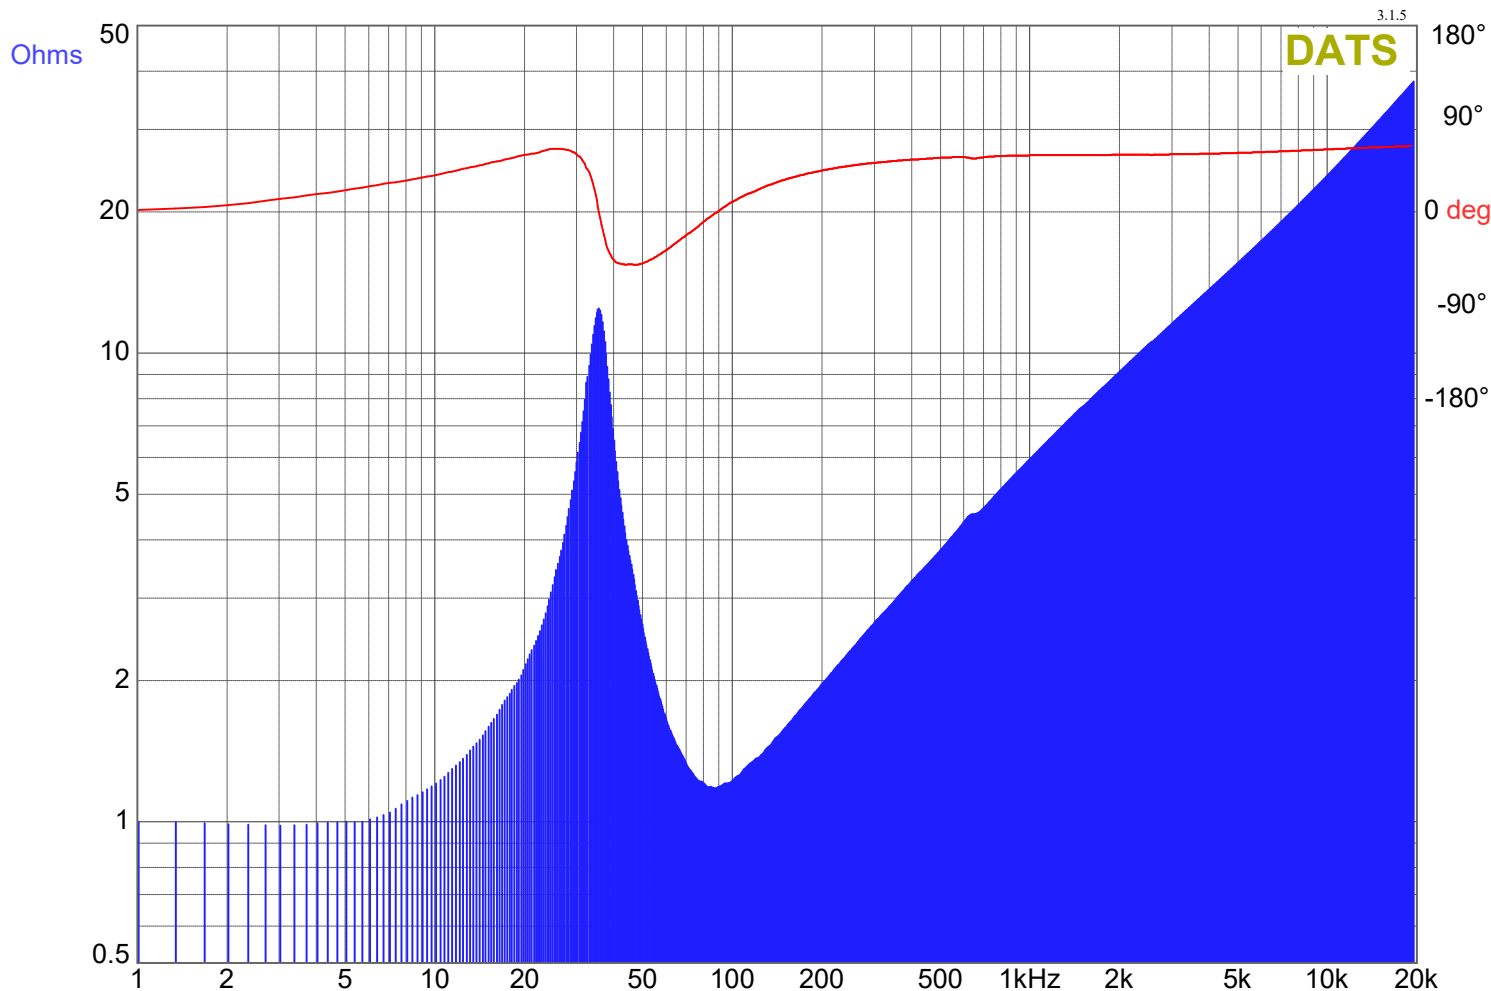

Workbench Notes:

Manufacturer: MDS

$f(s) = 35.6$ Hz

$Q(ts) = 0.4959$

$V(as) = 65.12$ liters (2.3 cubic feet)

SPL = 89.26 dB SPL 1W/1m

Nominal Diam. = 0 mm (0 in.)

Model: PS10500D2

$R(e) = 0.9826$ Ohms

$Q(es) = 0.5384$

Piston Diam. = 254 mm (10 in.)

SPL = 98.37 dB SPL 2.83 Vrms

$C(ms) = 0.181$ mm/N

$Z(max) = 12.45$ Ohms

$L(e) = 0.384$ mH at 10kHz

$Q(ms) = 6.285$

BL = 6.722

$n(0) = 0.5202$ %

$M(ms) = 110.7$ grams

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer