


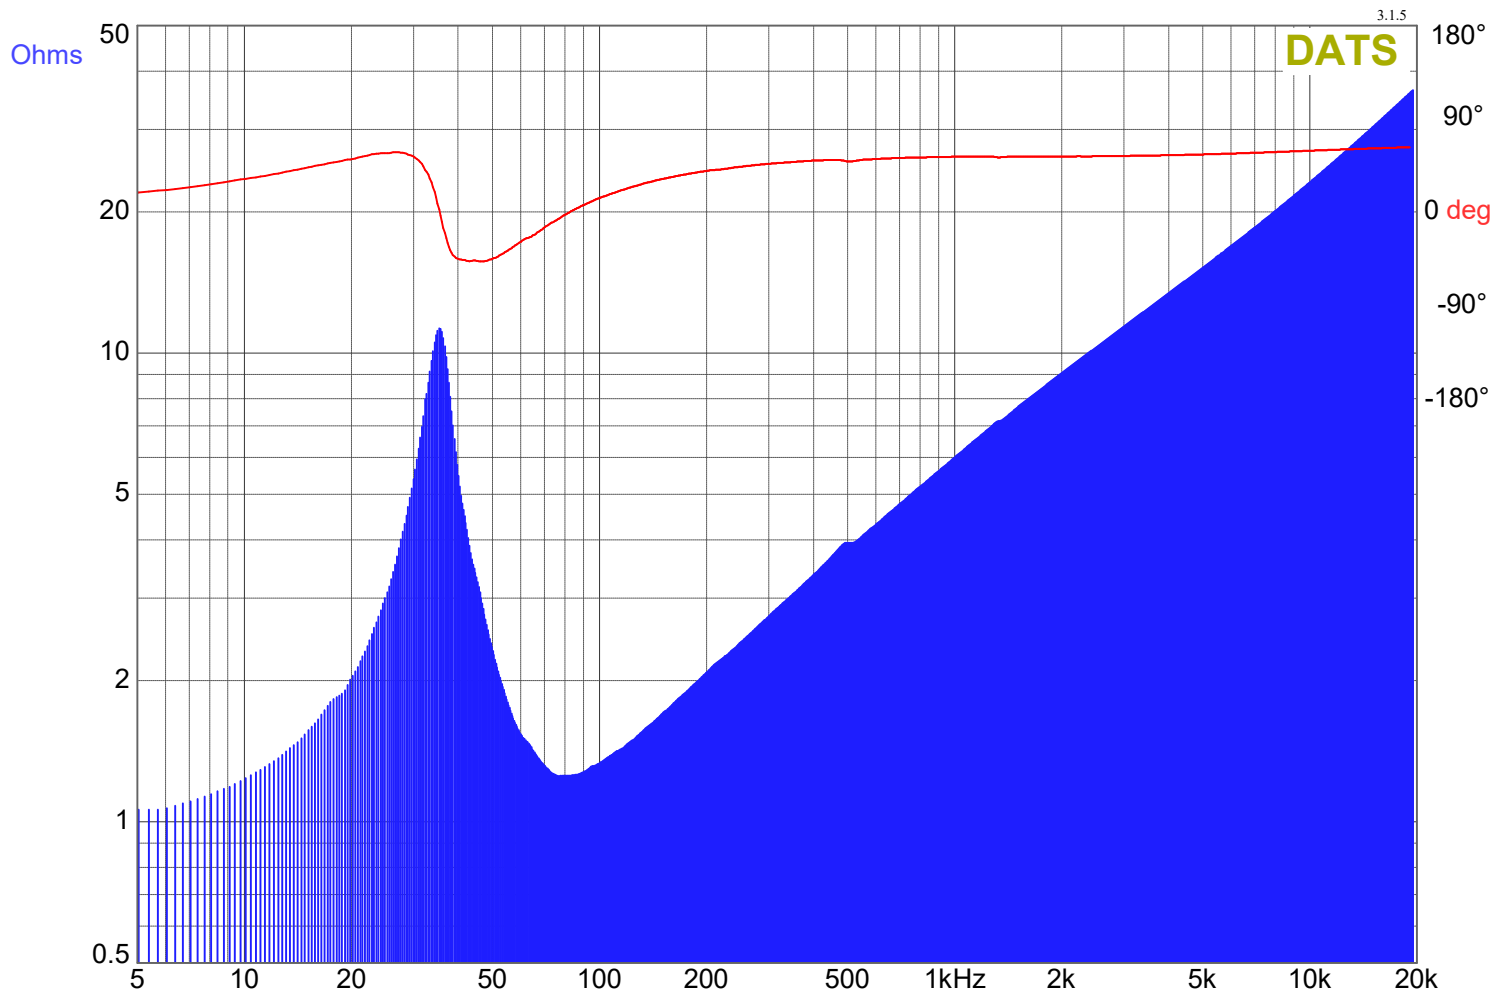

Workbench Notes:

Manufacturer: MDS

$f(s) = 35.43$ Hz

$Q(ts) = 0.5918$

$V(as) = 111.7$ liters (3.945 cubic feet)

SPL = 90.71 dB SPL 1W/1m

Nominal Diam. = 0 mm (0 in.)

Model: PS12500D2V2

$R(e) = 1.047$ Ohms

$Q(es) = 0.6522$

Piston Diam. = 300 mm (11.81 in.)

SPL = 99.54 dB SPL 2.83 Vrms

$C(ms) = 0.159$ mm/N

$Z(max) = 11.3$ Ohms

$L(e) = 0.3718$ mH at 10kHz

$Q(ms) = 6.388$

BL = 6.73

$n(0) = 0.7262$ %

$M(ms) = 126.8$ grams

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Paukatie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer