


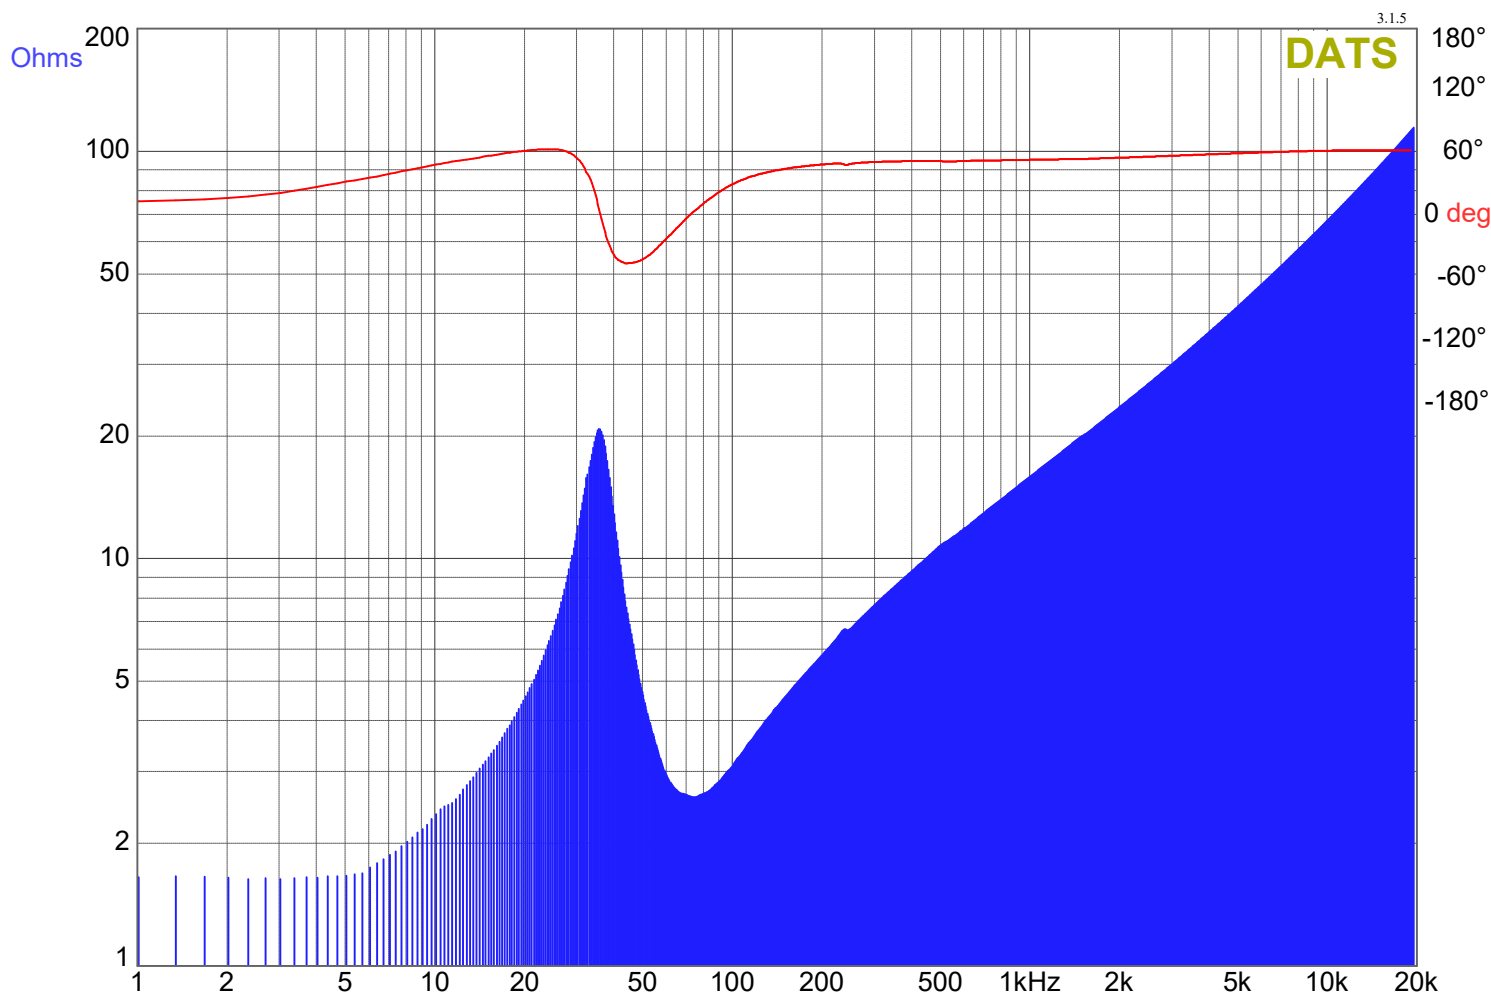

Workbench Notes:

Manufacturer: MDS

$f(s) = 35.73 \text{ Hz}$

$Q(ts) = 0.4248$

$V(as) = 34.4 \text{ liters (1.215 cubic feet)}$

$SPL = 87.21 \text{ dB SPL } 1W/1m$

Nominal Diam. = 300 mm (12 in.)

Model: D12R 4000 D0.7

$R(e) = 1.644 \text{ Ohms}$

$Q(es) = 0.4613$

Piston Diam. = 304.8 mm (12 in.)

$SPL = 94.08 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.046 \text{ mm/N}$

$Z(max) = 20.77 \text{ Ohms}$

$L(e) = 1.078 \text{ mH at } 10\text{kHz}$

$Q(ms) = 5.367$

$BL = 18.57$

$n(0) = 0.3244 \%$

$M(ms) = 431.3 \text{ grams}$

Mittaus suoritettu 7h subwooferin sisäänajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer