


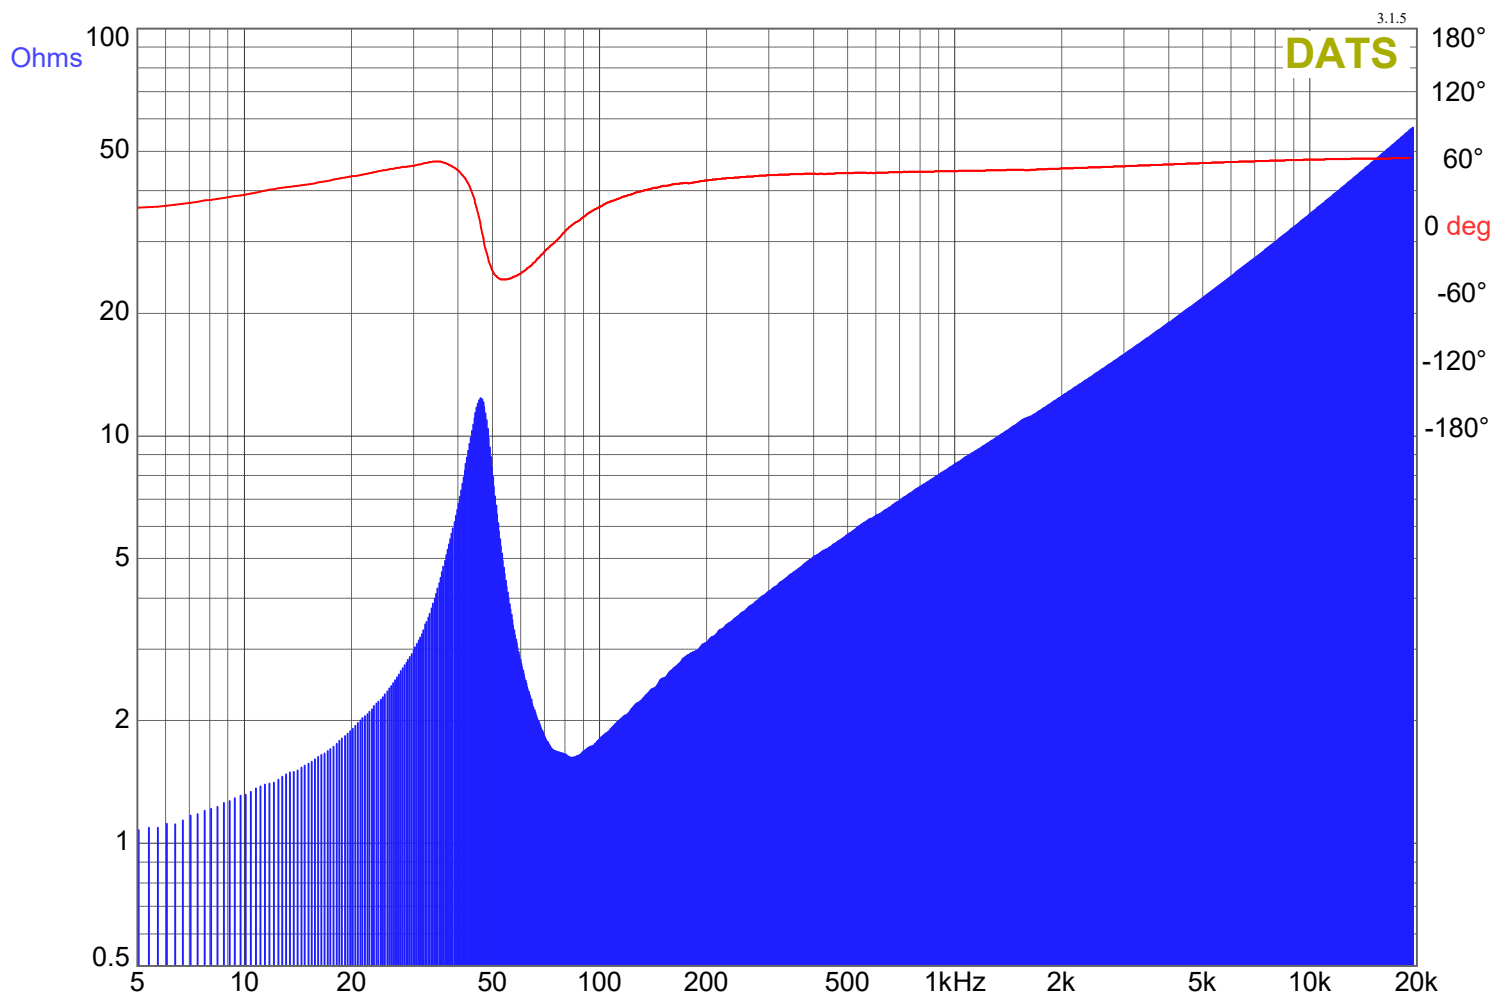

Workbench Notes:

Manufacturer: MDS

$f(s) = 46.3$ Hz

$Q(ts) = 0.5882$

$V(as) = 24.07$ liters (0.8498 cubic feet)

SPL = 87.58 dB SPL 1W/1m

Nominal Diam. = 300 mm (12 in.)

Model: D12R 2000D2

$R(e) = 1.077$ Ohms

$Q(es) = 0.6443$

Piston Diam. = 304.8 mm (12 in.)

SPL = 96.29 dB SPL 2.83 Vrms

$C(ms) = 0.032$ mm/N

$Z(max) = 12.37$ Ohms

$L(e) = 0.561$ mH at 10kHz

$Q(ms) = 6.756$

BL = 13.36

$n(0) = 0.3534$ %

$M(ms) = 367.2$ grams

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer