


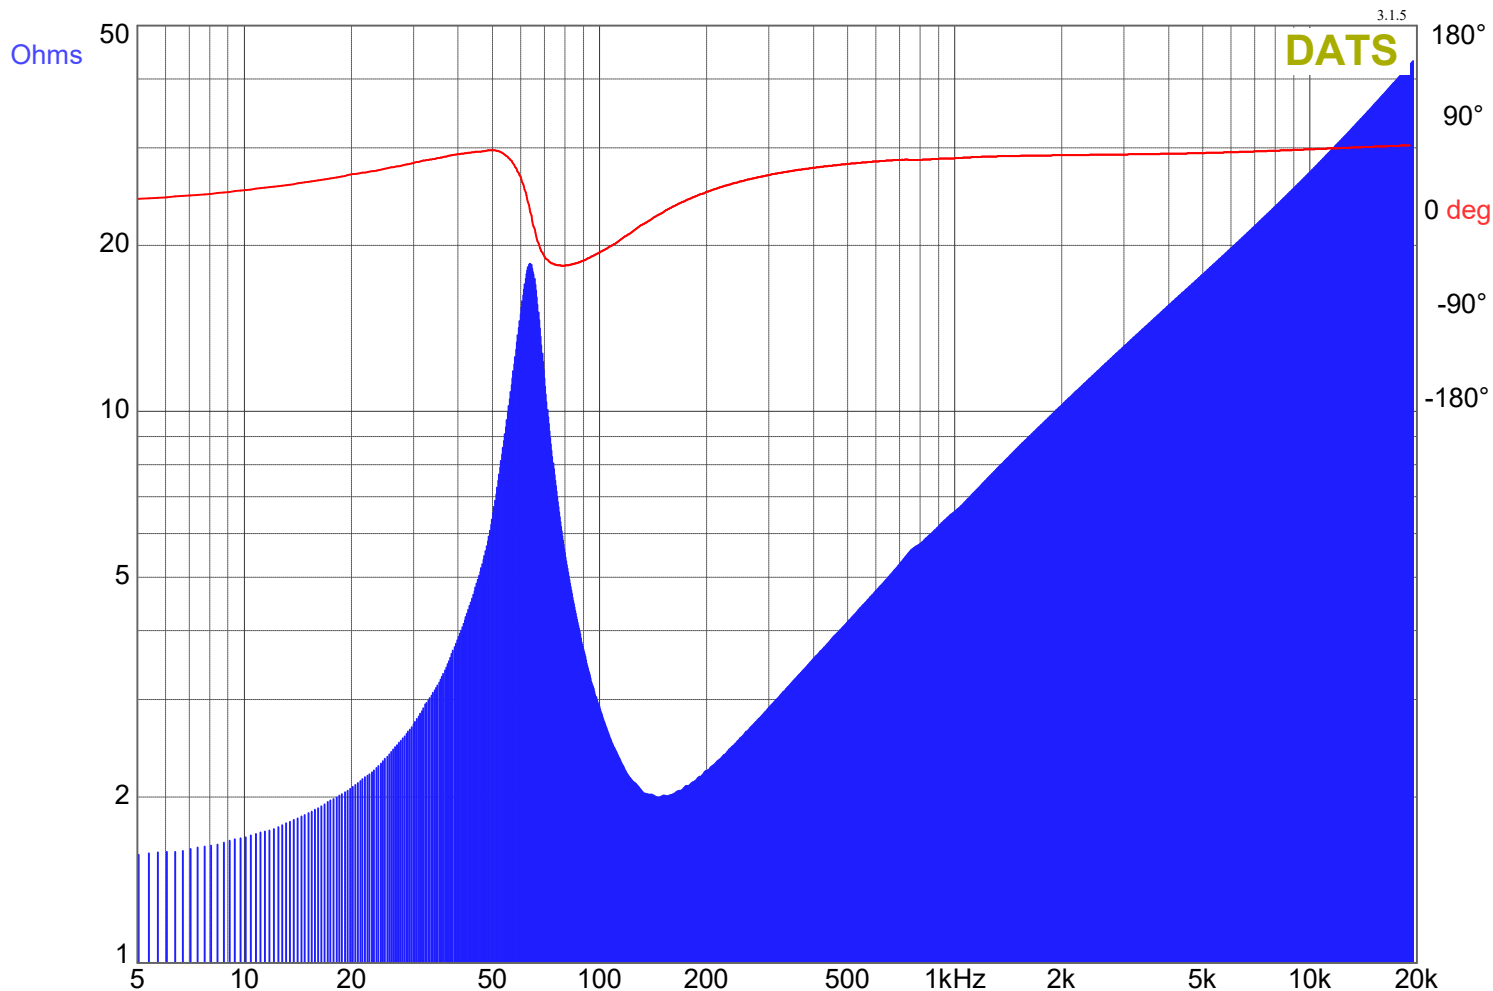

Workbench Notes:

Manufacturer: MDS

$f(s) = 63.76$ Hz

$Q(ts) = 0.5526$

$V(as) = 5.311$ liters (0.1876 cubic feet)

SPL = 85.47 dB SPL 1W/1m

Nominal Diam. = 150 mm (6.5 in.)

Model: PS06500D4

$R(e) = 1.561$ Ohms

$Q(es) = 0.6036$

Piston Diam. = 165.1 mm (6.5 in.)

SPL = 92.57 dB SPL 2.83 Vrms

$C(ms) = 0.083$ mm/N

$Z(max) = 18.48$ Ohms

$L(e) = 0.4342$ mH at 10kHz

$Q(ms) = 6.542$

BL = 8.846

$n(0) = 0.2175$ %

$M(ms) = 75.52$ grams

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer