


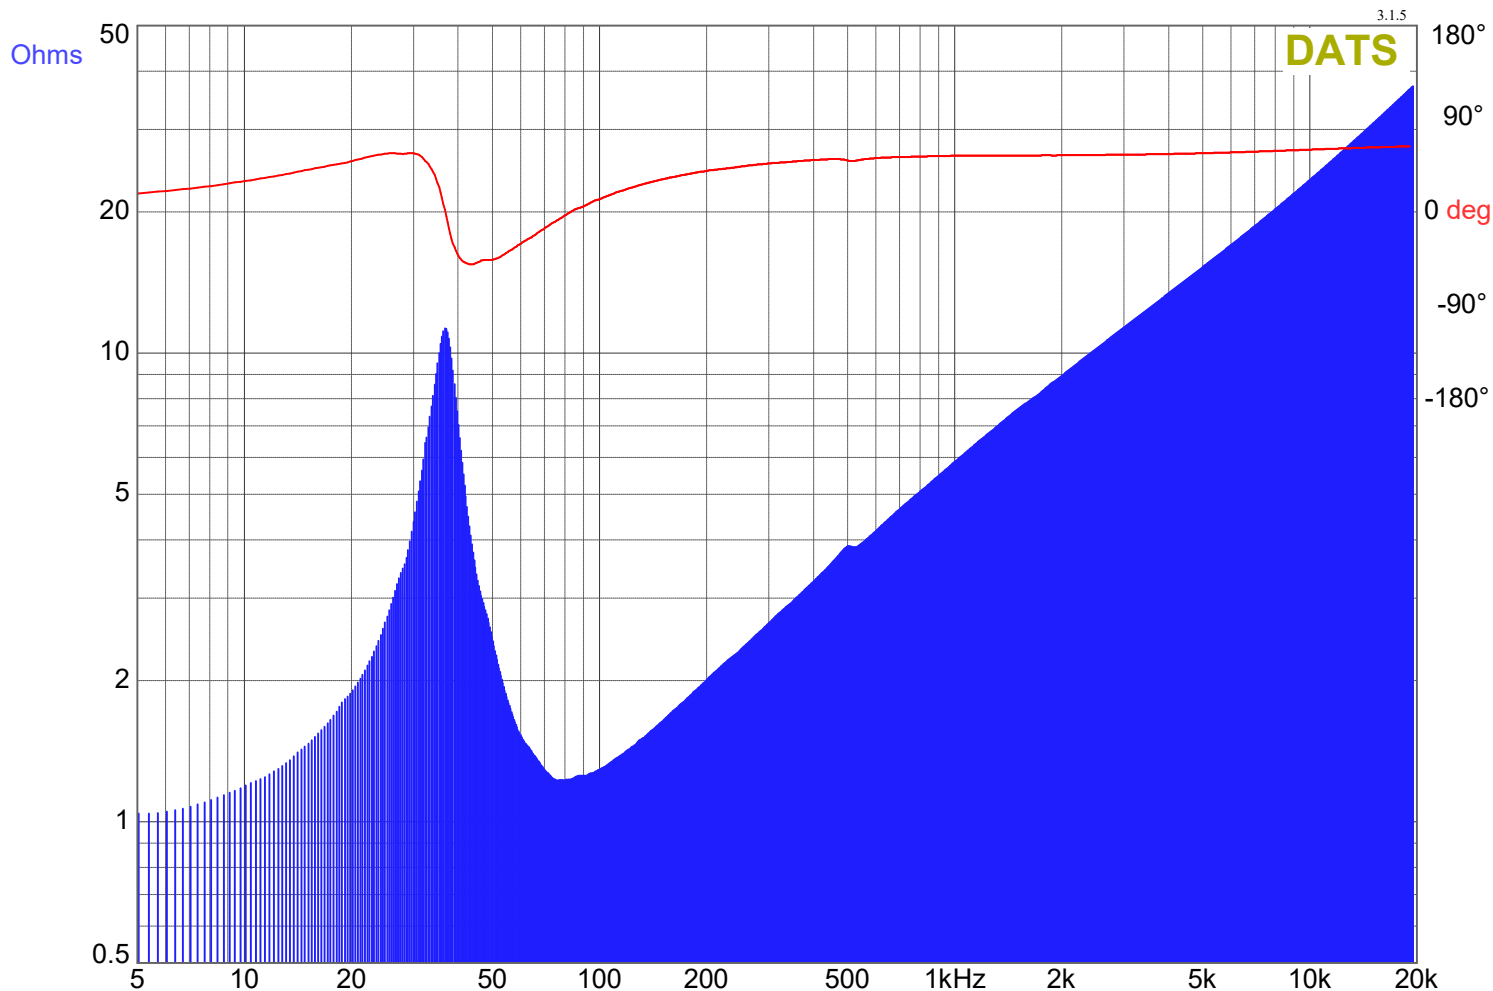

Workbench Notes:

Manufacturer: DLE

$f(s) = 36.81 \text{ Hz}$

$Q(ts) = 0.6417$

$V(as) = 112.5 \text{ liters (3.974 cubic feet)}$

$SPL = 90.9 \text{ dB SPL } 1W/1m$

Nominal Diam. = 0 mm (0 in.)

Model: FF12V2

$R(e) = 1.028 \text{ Ohms}$

$Q(es) = 0.706$

Piston Diam. = 304.8 mm (12 in.)

$SPL = 99.81 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.15 \text{ mm/N}$

$Z(max) = 11.29 \text{ Ohms}$

$L(e) = 0.376 \text{ mH at } 10\text{kHz}$

$Q(ms) = 7.041$

$BL = 6.47$

$n(0) = 0.7579 \%$

$M(ms) = 124.2 \text{ grams}$

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer