


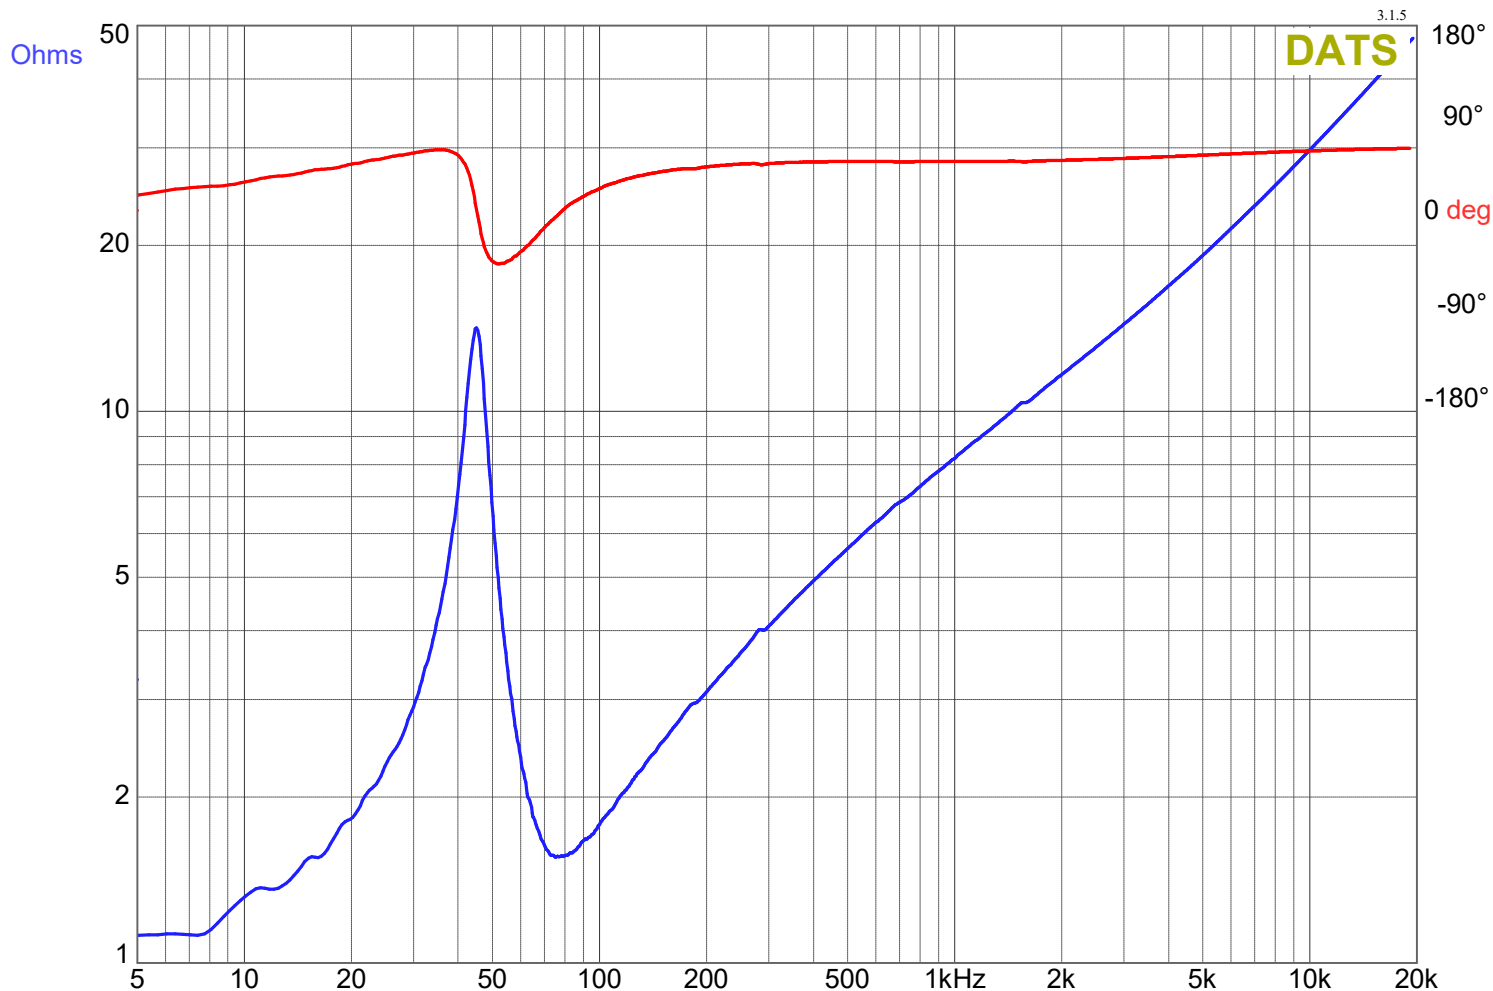

Workbench Notes:

Manufacturer: MDS

$f(s) = 45.02 \text{ Hz}$

$Q(ts) = 0.649$

$V(as) = 30.78 \text{ liters (1.087 cubic feet)}$

$SPL = 87.9 \text{ dB SPL } 1W/1m$

Nominal Diam. = 0 mm (0 in.)

Model: PS1215000D2

$R(e) = 1.106 \text{ Ohms}$

$Q(es) = 0.7041$

Piston Diam. = 304.8 mm (12 in.)

$SPL = 96.5 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.041 \text{ mm/N}$

$Z(max) = 14.14 \text{ Ohms}$

$L(e) = 0.477 \text{ mH at } 10\text{kHz}$

$Q(ms) = 8.298$

$BL = 11.61$

$n(0) = 0.3803 \%$

$M(ms) = 303.6 \text{ grams}$

Mittaus suoritettu 4h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: **Niko Luomajoki**

Title: **Audio engineer**