


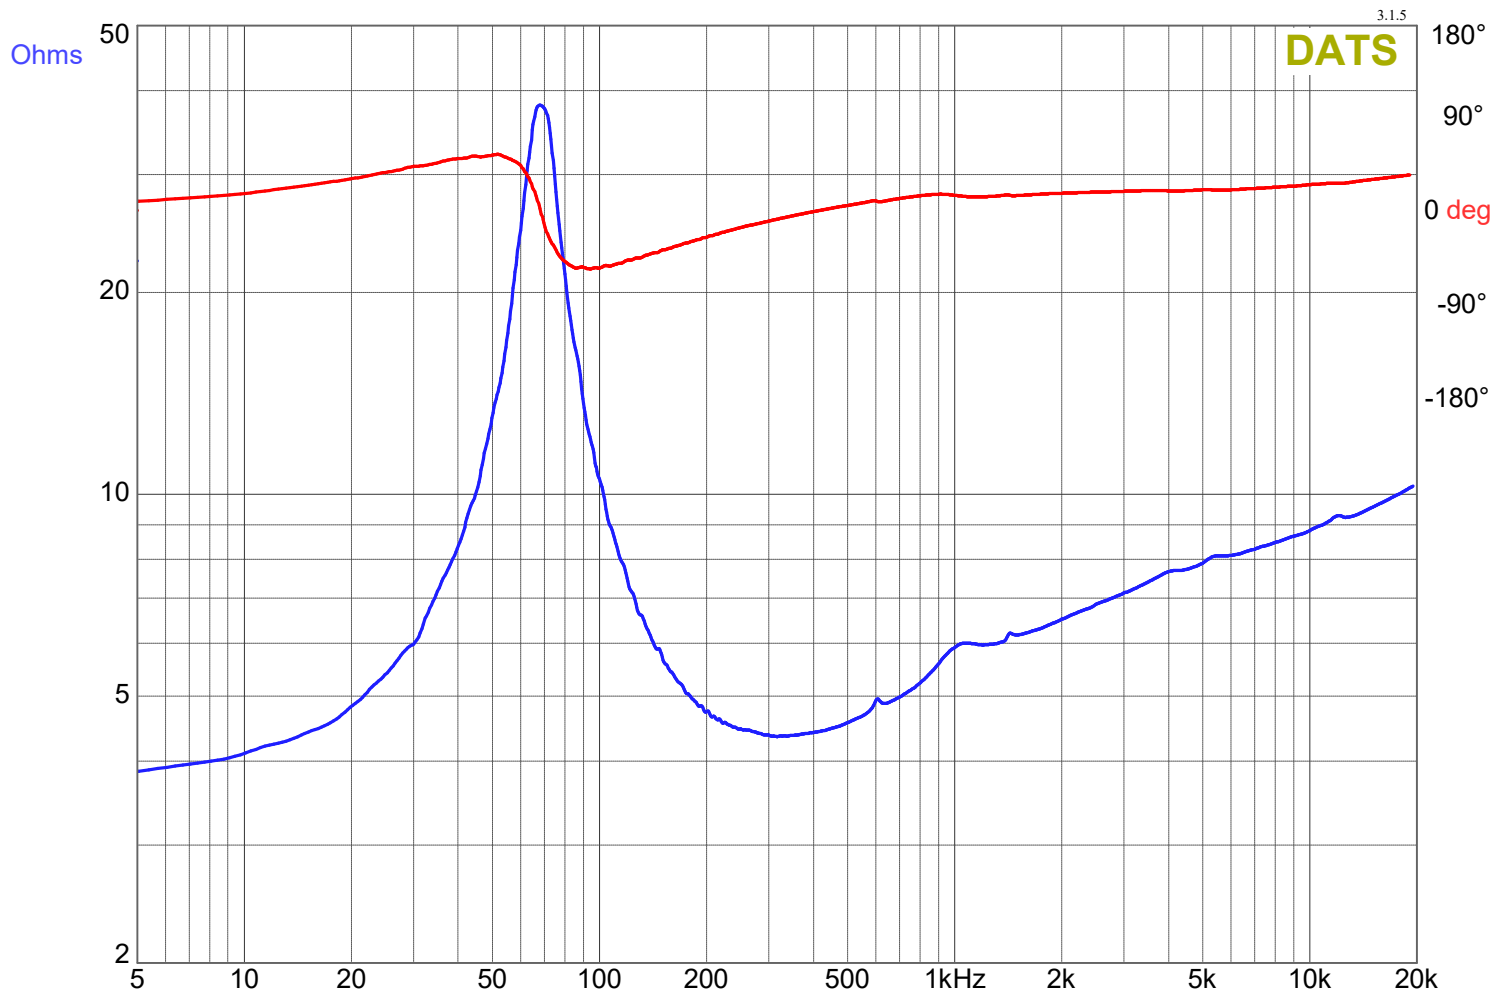

Workbench Notes:

Manufacturer: MDS

$f(s) = 67.86 \text{ Hz}$

$Q(ts) = 0.4607$

$V(as) = 17.18 \text{ liters (0.6066 cubic feet)}$

$SPL = 92.1 \text{ dB SPL } 1W/1m$

Nominal Diam. = 165 mm (6.5 in.)

Model: A6R

$R(e) = 3.775 \text{ Ohms}$

$Q(es) = 0.5114$

Piston Diam. = 165.1 mm (6.5 in.)

$SPL = 95.36 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.267 \text{ mm/N}$

$Z(max) = 38.03 \text{ Ohms}$

$L(e) = 0.1298 \text{ mH at } 10\text{kHz}$

$Q(ms) = 4.641$

$BL = 8.055$

$n(0) = 1.001 \%$

$M(ms) = 20.61 \text{ grams}$

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer