


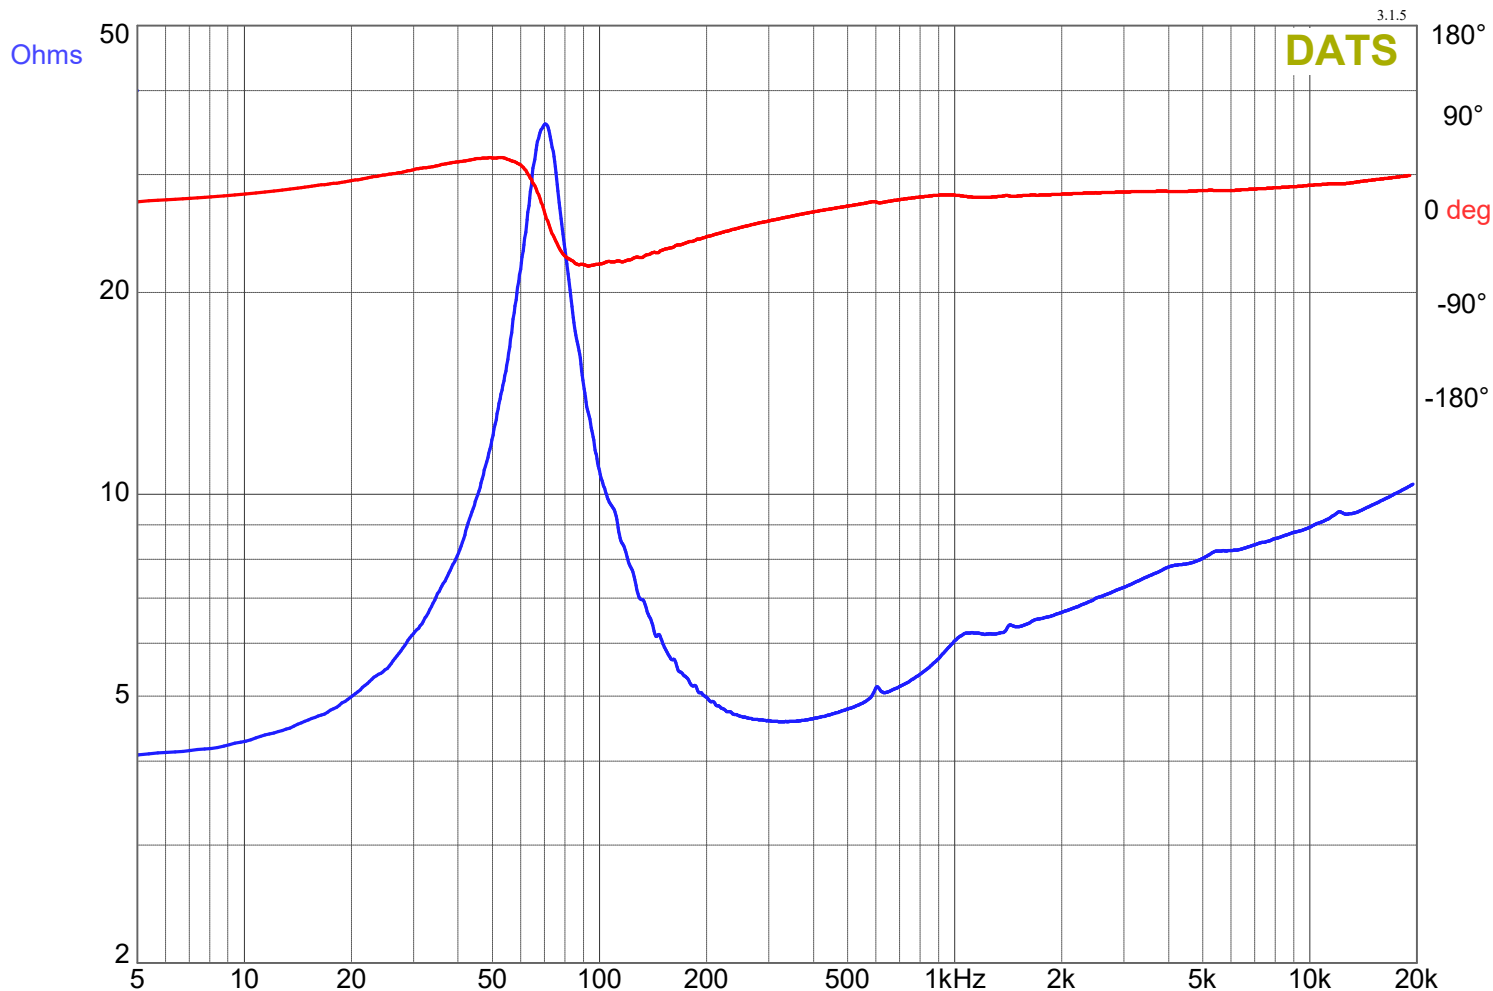

Workbench Notes:

Manufacturer: MDS

$f(s) = 70.52 \text{ Hz}$

$Q(ts) = 0.5104$

$V(as) = 16.99 \text{ liters (0.5999 cubic feet)}$

$SPL = 92.04 \text{ dB SPL } 1W/1m$

Nominal Diam. = 153 mm (6.5 in.)

Model: A6R

$R(e) = 4.048 \text{ Ohms}$

$Q(es) = 0.5759$

Piston Diam. = 152.4 mm (6 in.)

$SPL = 95 \text{ dB SPL } 2.83 \text{ Vrms}$

$C(ms) = 0.364 \text{ mm/N}$

$Z(max) = 35.61 \text{ Ohms}$

$L(e) = 0.129 \text{ mH at } 10\text{kHz}$

$Q(ms) = 4.49$

$BL = 6.606$

$\eta(0) = 0.9865 \%$

$M(ms) = 14.01 \text{ grams}$

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer