


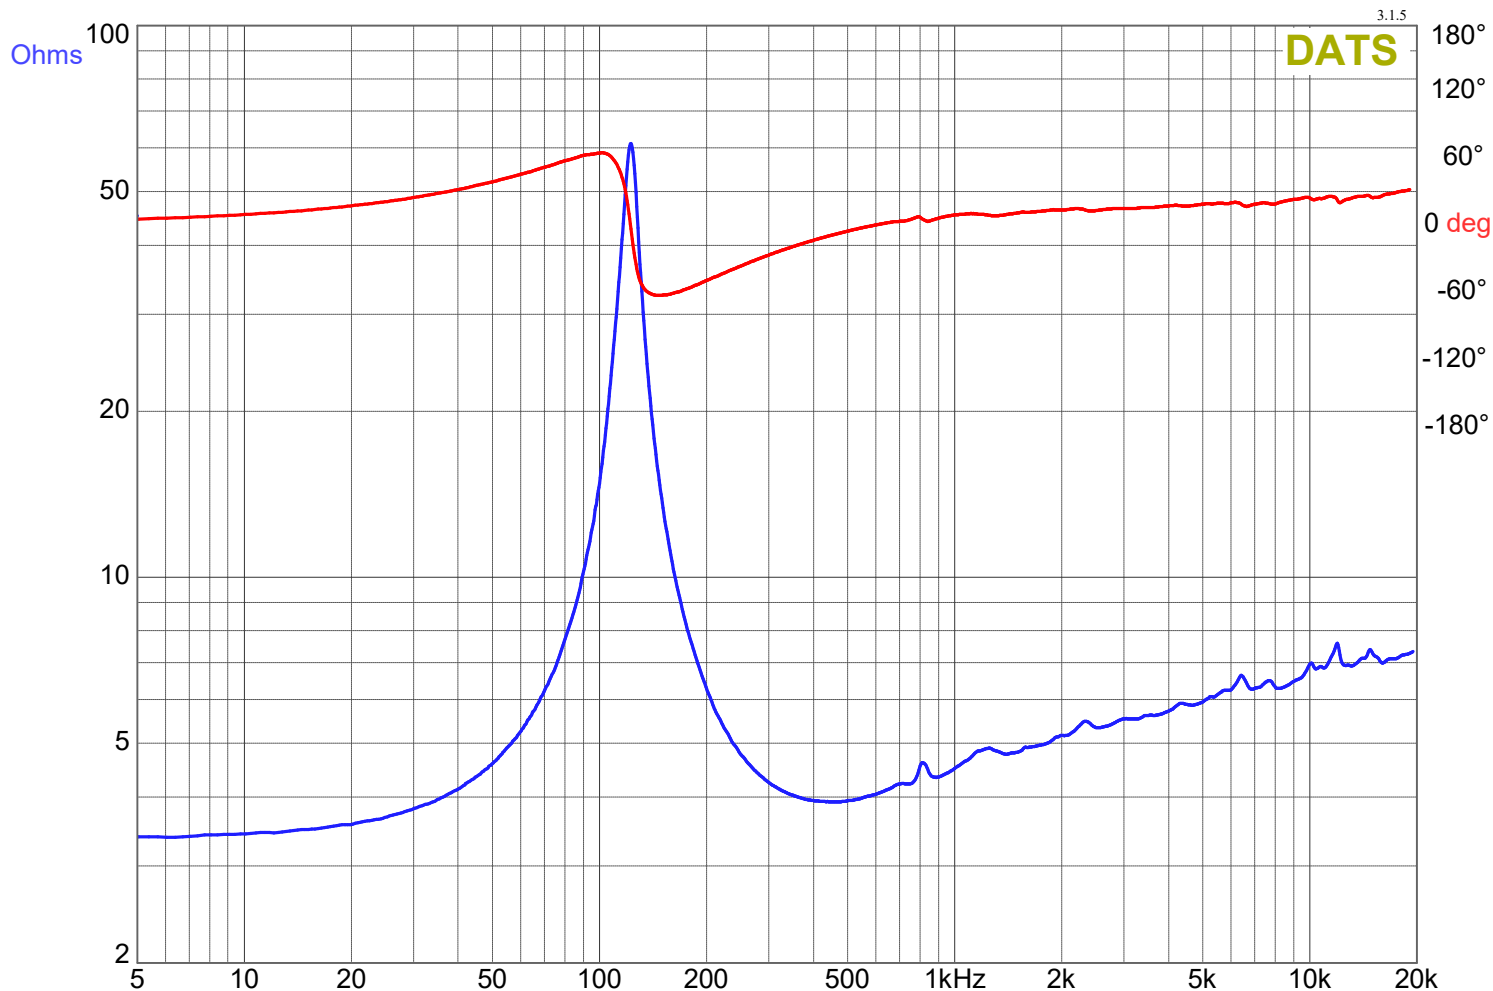

Workbench Notes:

Manufacturer: MDS

$f(s) = 122.6 \text{ Hz}$

$Q(ts) = 0.5859$

$V(as) = 7.421 \text{ liters (0.2621 cubic feet)}$

$SPL = 95.32 \text{ dB SPL 1W/1m}$

Nominal Diam. = 145 mm (6 in.)

Model: PA6H

$R(e) = 3.379 \text{ Ohms}$

$Q(es) = 0.6202$

Piston Diam. = 152.4 mm (6 in.)

$SPL = 99.07 \text{ dB SPL 2.83 Vrms}$

$C(ms) = 0.159 \text{ mm/N}$

$Z(max) = 61.09 \text{ Ohms}$

$L(e) = 0.09915 \text{ mH at 10kHz}$

$Q(ms) = 10.59$

$BL = 6.675$

$\eta(0) = 2.101 \%$

$M(ms) = 10.62 \text{ grams}$

Mittaus suoritettu 2h subwooferin sisäänaajon jälkeen

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer