


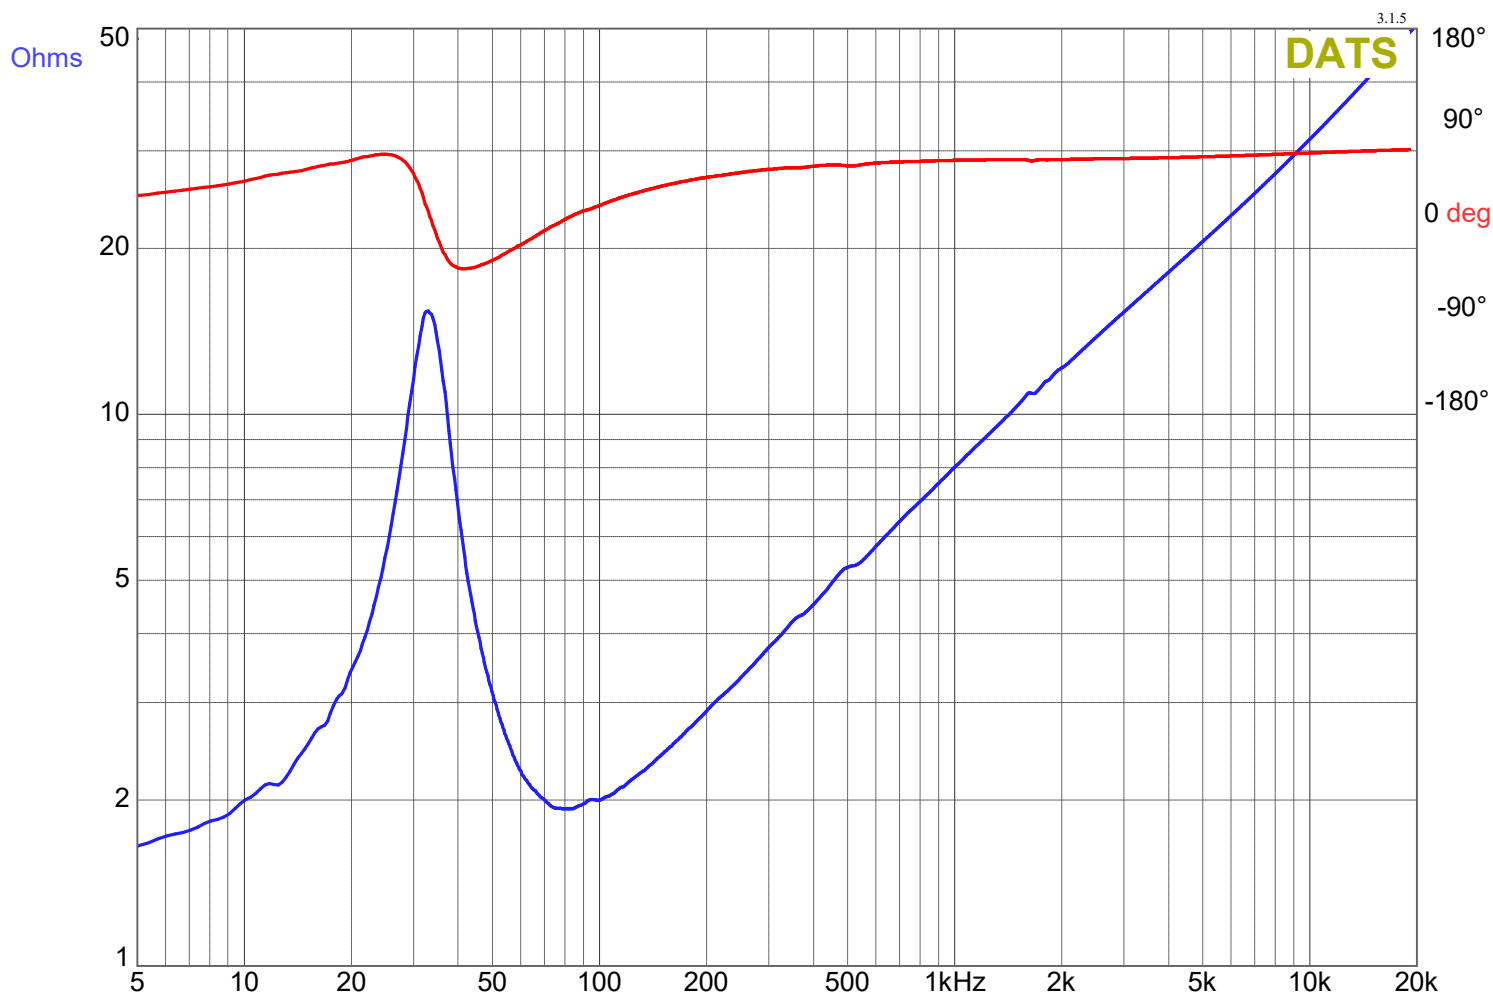

Workbench Notes:

Manufacturer: DLE

$f(s) = 32.91$ Hz

$Q(ts) = 0.5404$

$V(as) = 81.13$ liters (2.865 cubic feet)

SPL = 88.72 dB SPL 1W/1m

Nominal Diam. = 300 mm (12 in.)

Model: FF12500D4

$R(e) = 1.527$ Ohms

$Q(es) = 0.6$

Piston Diam. = 304.8 mm (12 in.)

SPL = 95.92 dB SPL 2.83 Vrms

$C(ms) = 0.108$ mm/N

$Z(max) = 15.37$ Ohms

$L(e) = 0.5044$ mH at 10kHz

$Q(ms) = 5.441$

BL = 10.65

$n(0) = 0.4593$ %

$M(ms) = 215.6$ grams

Mittaus suoritettu 5h subwooferin sisäänajon jälkeen

Autoviihde Finland Oy

Paukatie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer