


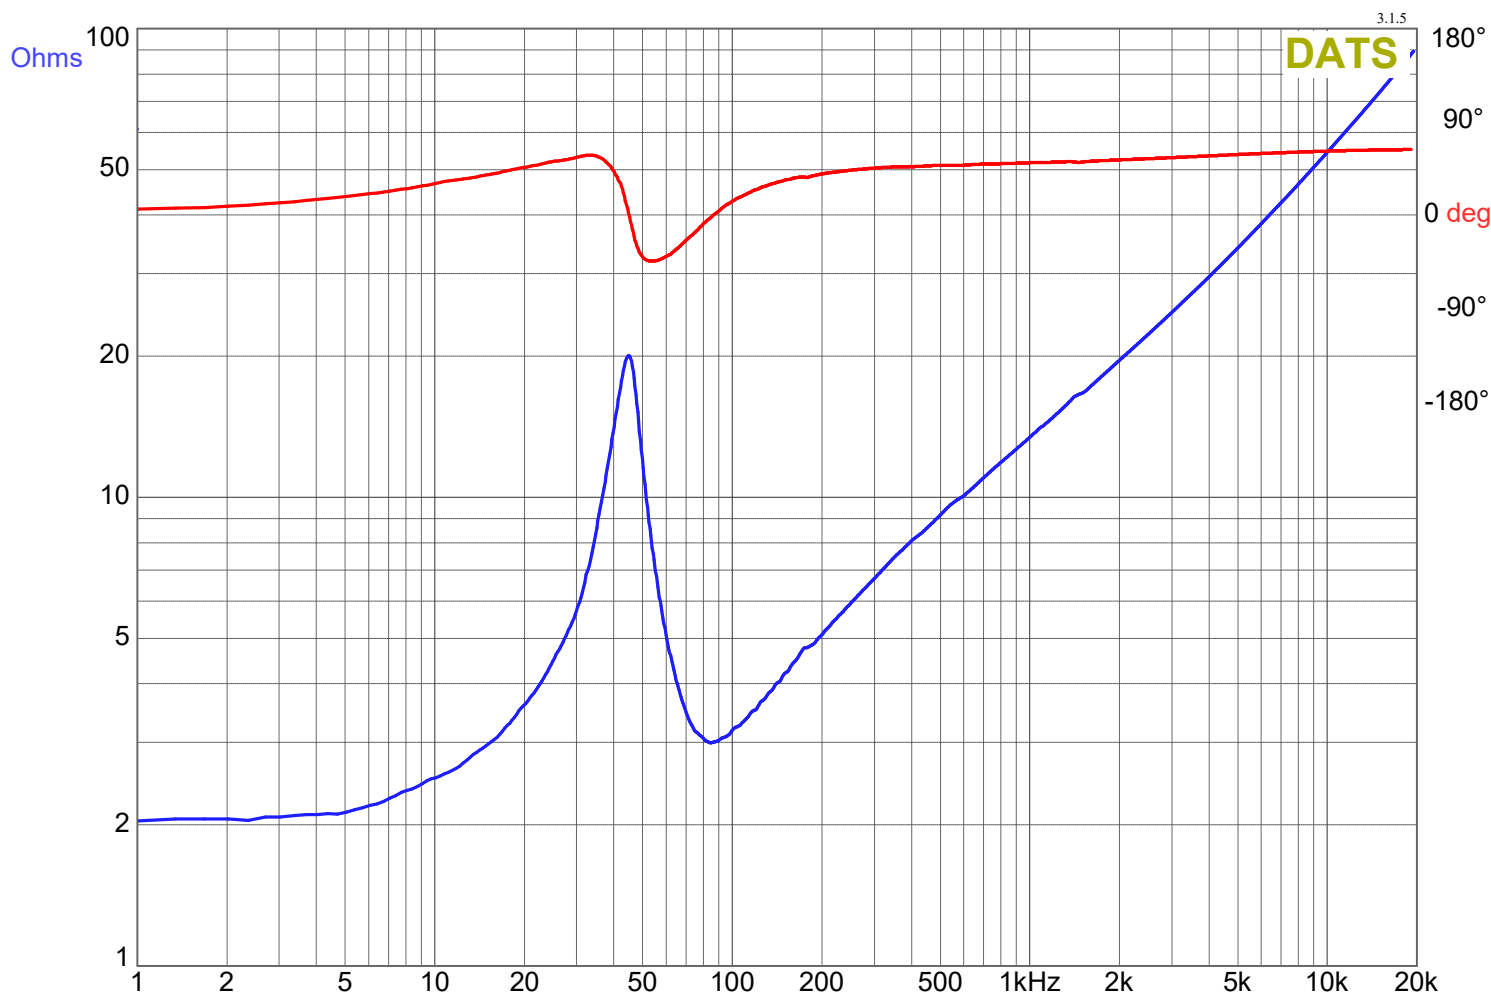

Workbench Notes:

Manufacturer: MDS

$f(s) = 44.78$ Hz

$Q(ts) = 0.5825$

$V(as) = 25.62$ liters (0.9047 cubic feet)

SPL = 87.39 dB SPL 1W/1m

Nominal Diam. = 300 mm (12 in.)

Model: D12R2000D1

$R(e) = 2.051$ Ohms

$Q(es) = 0.6489$

Piston Diam. = 304.8 mm (12 in.)

SPL = 93.3 dB SPL 2.83 Vrms

$C(ms) = 0.034$ mm/N

$Z(max) = 20.06$ Ohms

$L(e) = 0.8695$ mH at 10kHz

$Q(ms) = 5.697$

BL = 18.11

$\eta(0) = 0.3381$ %

$M(ms) = 368.7$ grams

Mittaus suoritettu 8h subwooferin sisäänajon jälkeen.

Autoviihde Finland Oy

Pauketie 2

Oulu 90410

08 348300

Measurements by: Niko Luomajoki

Title: Audio engineer